


# Data sheet

Part No.	<b>BSSH</b>
Description	rigid conduit, plain ends medium compression resistance, medium impact resistance
Colour	black, similar to RAL 9005 white, similar to RAL 9010
Fire Behaviour	non flame propagating
Classification	33211

**PVC-LSF** 

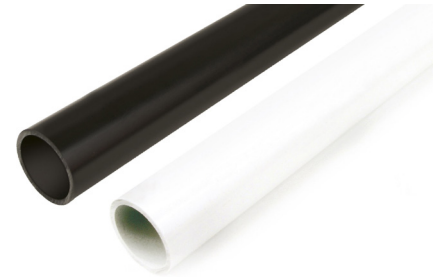


Standard: EN 61386-21



Compression resistance	Impact resistance	Operating temperature	Bending strength	Material
> 750 N	> 2 J	-5 to +60°C	Rigid	PVC-LSF

Art. no.	ED	ID	PU	PU
103 718 BSSH 20 WH	20mm	16,4mm	3 m	90 m
103 719 BSSH 25 WH	25mm	21,4mm	3 m	90 m
105 790 BSSH 20 BK	20mm	16,4mm	3 m	90 m
105 791 BSSH 25 BK	25mm	21,4mm	3 m	90 m

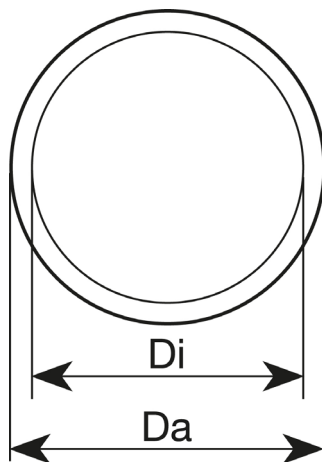

For sale in the UK market only.