


Data sheet

Part No.	SLR
Description	Starline trunking compression resistance > 1250 N Properties: for the supply of power, data and telecommunication cabling, versatile system in three standard trunking assemblies, all with three fully segregated compartments, further segregation of services possible by using trunking dividers, special clip-on system for robust connections between trunking body and lid (shock- and child-proof).
Colour	white, similar to RAL 9010
Fire Behaviour	non flame propagating



Standard: EN 50085, BS 4678 Part 4

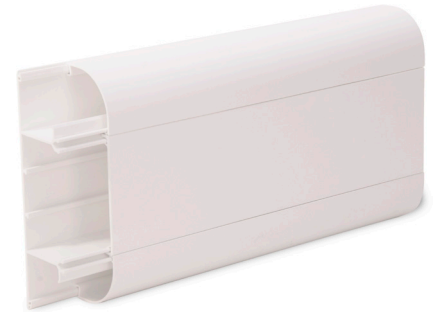

Length	Working temperature	Material
3000mm	-25 to +60°C	PVC-U

Art. no.	Width x Depth	PU	PU
101 124 SLR 50/170 3M	170 x 50 mm	3 m	150 m